
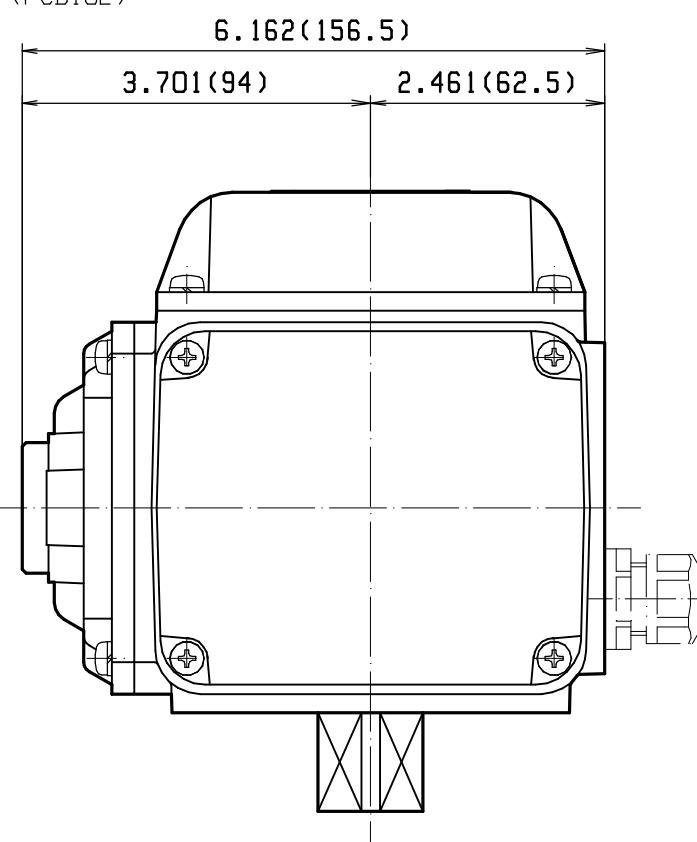
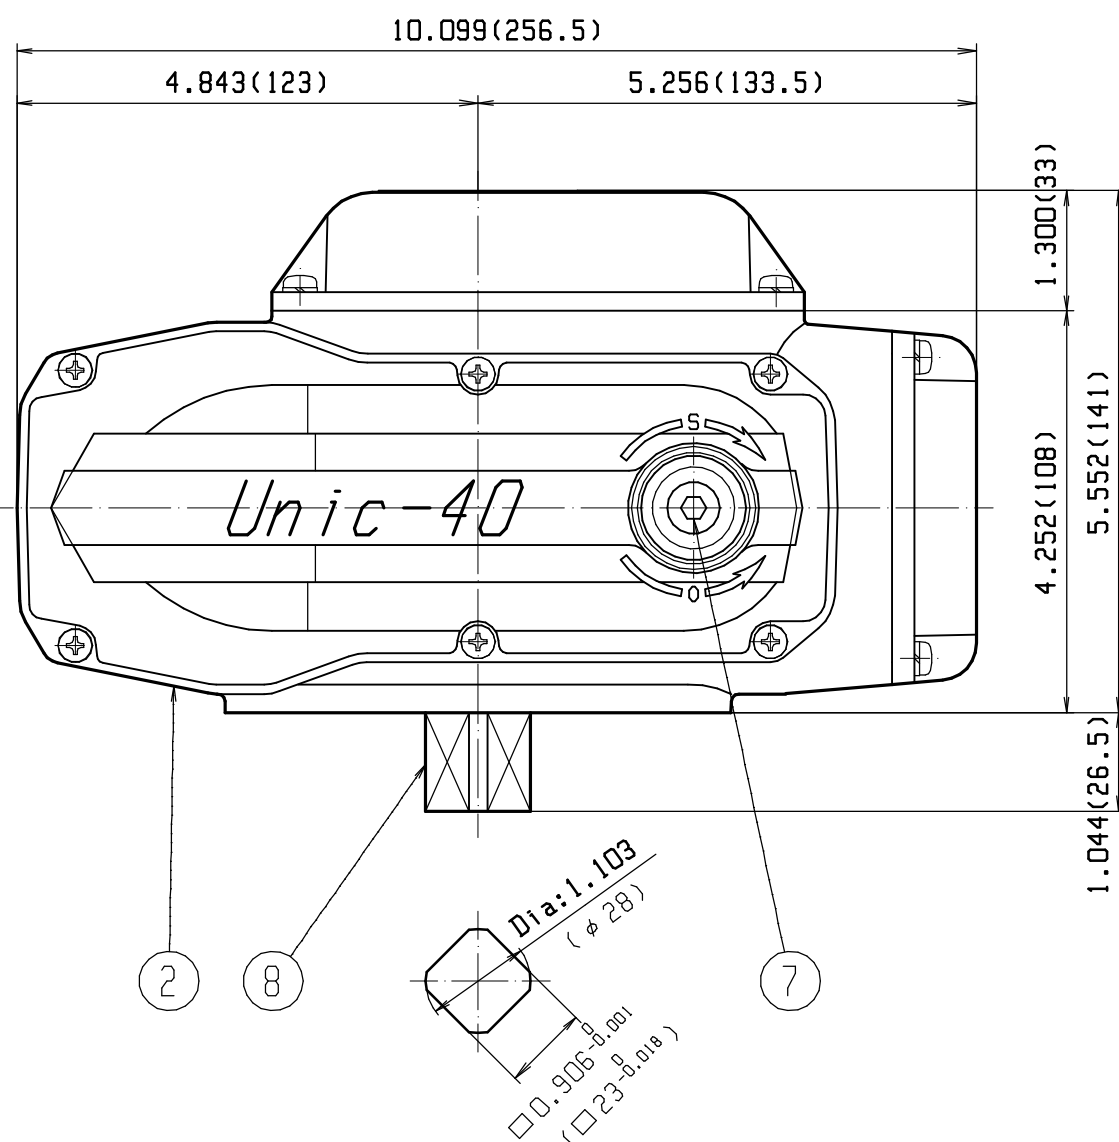
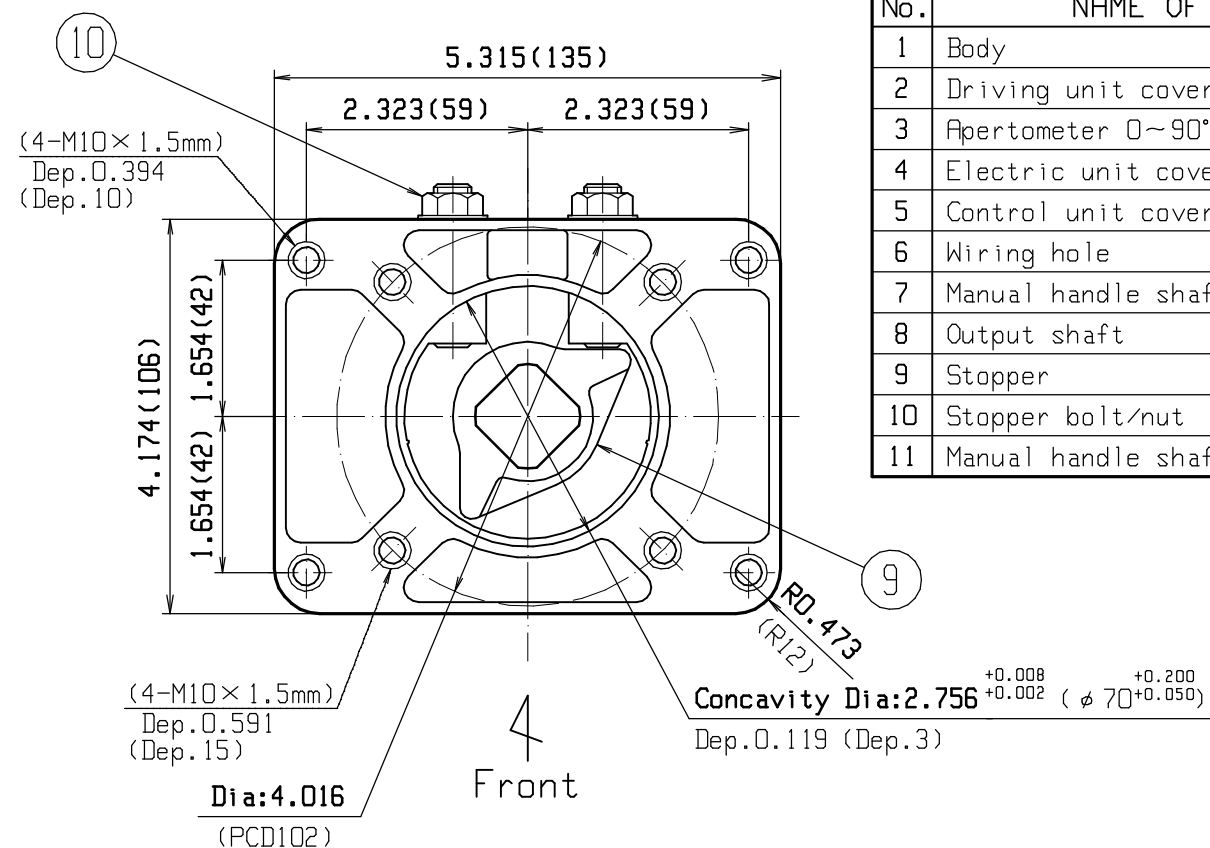


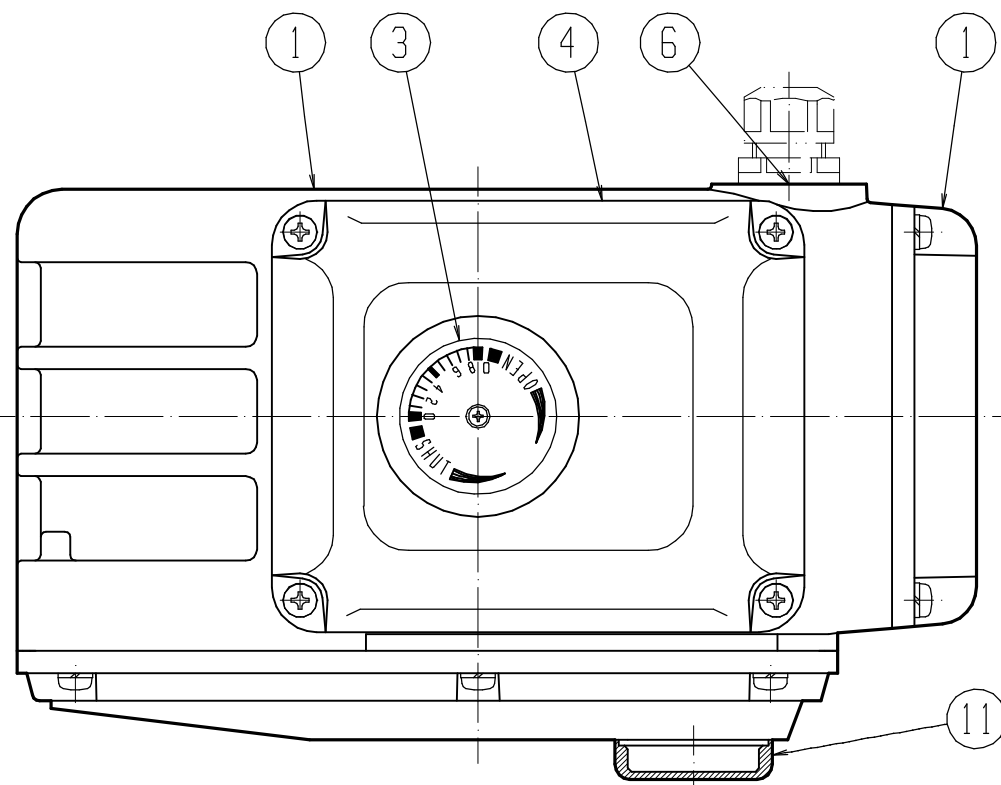

No.	NAME OF PART	Q'TY	M T L	REMARKS
1	Body	1	ADC12	
2	Driving unit cover	1	ADC12	
3	Apertometer 0~90° 10div.	1	GLASS	
4	Electric unit cover	1	ADC12	
5	Control unit cover	1	ADC12	
6	Wiring hole	1	—	NPT1/2
7	Manual handle shaft	1	S45C	
8	Output shaft	1	SUS304	
9	Stopper	1	SCS13	
10	Stopper bolt/nut	2	SUS304	
11	Manual handle shaft rubber cap	1	NBR	

CERTIFICATE OF COMPLIANCE		
TYPE	CERTIFICATE NUMBER	ISSUED BY
NEMA-4,4X	161097-E177862	UL
CSA.NRTL/C	LR110832-1,2	CSA
CE	EMS 1B0704-1,2	ASSESSMENT SERVICE

DRIVING UNIT SPECIFICATION	
POWER SOURCE	AC115V・120V・240V 60Hz Single phase
CONTROL ANGLE	0~90° degree.
OPERATION SPEED	25sec./90deg.
OUTPUT SHAFT TORQUE	3472in-lb (392.27N・m)
MANUAL OPERATION	Available
BODY MATERIAL	Aluminium diecast
COATING COLOR	Gray(N-6)
BODY WEIGHT	7.8 kg

OUTPUT SHAFT POSITION : 0 %
DIMENSIONS ARE INCH(mm)

NAME: ACTUATOR OUTER DIMENSIONS	APRV.	DATE	SIGN
MODEL: Unic-40 (STD)	CONF.		
	DRAW.	04,FEB,'02	K.SUGIYAMA
KOEI INDUSTRY CO.,LTD.	DR.No,	15000GE3	