
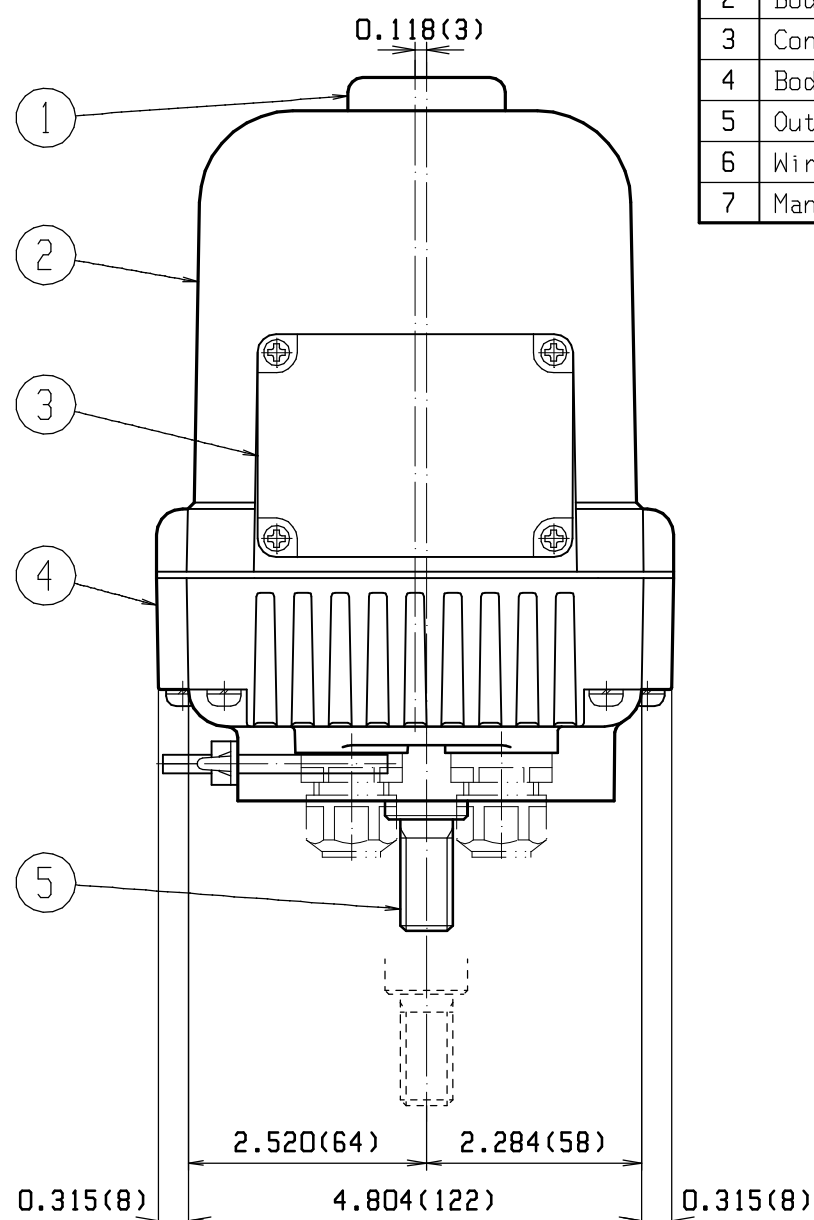


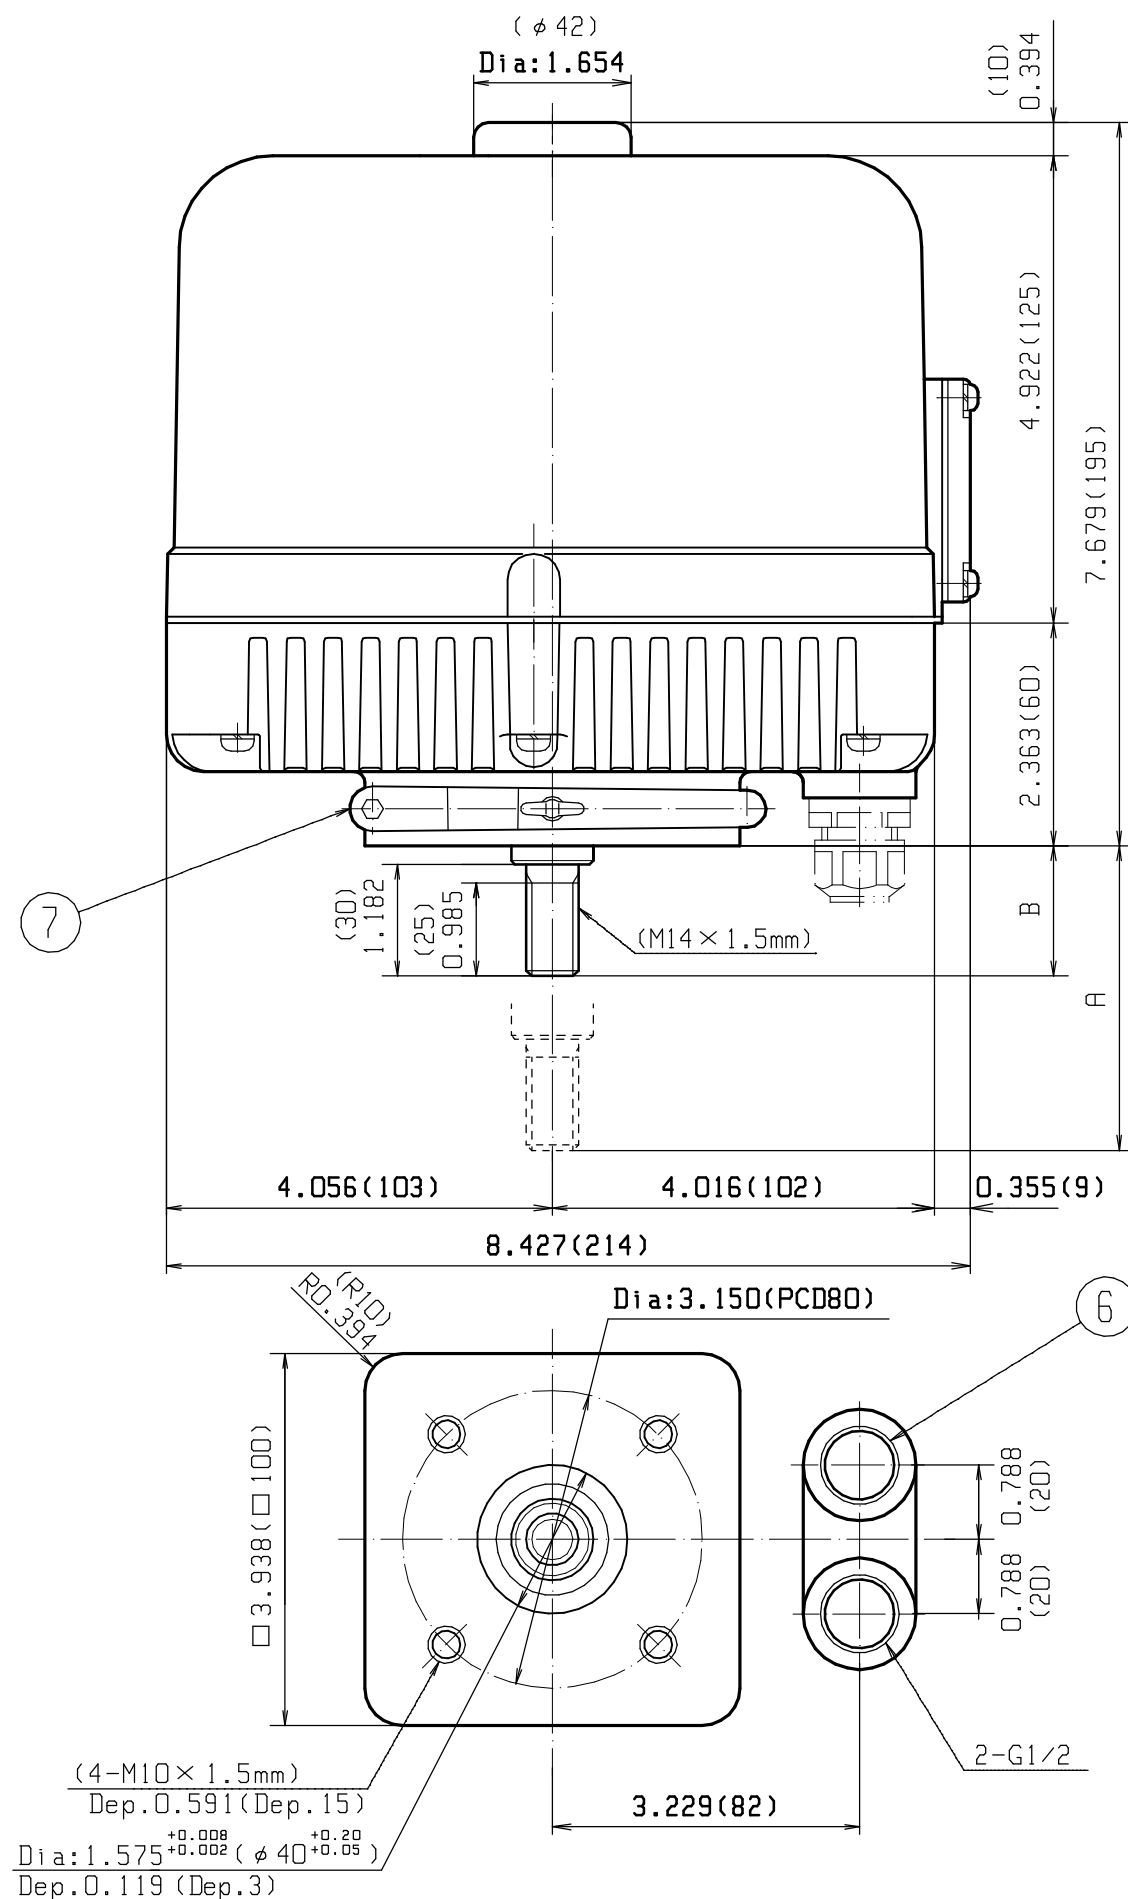

No.	NAME OF PART	Q'TY	M T L	REMARKS
1	Manual Handle Shaft Rubber Cap	1	NBR	
2	Body Cover	1	ADC12	
3	Control Unit Cover	1	ADC12	
4	Body Base	1	ADC12	
5	Output Shaft	1	SUS304	
6	Wiring Hole	2	—	NPT1/2
7	Manual Handle	1	SCS13	

DRIVING UNIT SPECIFICATION	
POWER SOURCE	AC115V • 120V • 240V 60Hz Single phase
STROKE	0~0.985inch(0~25mm)
THRUST	440.925lbf(1961.3N)
OPERATION SPEED	0.067inch/sec.(1.7mm/sec.)
MANUAL OPERATION	Available
COATING COLOR	Silver metallic
BODY MATERIAL	Aluminium diecast
BODY WEIGHT	7 kg

CERTIFICATE OF COMPLIANCE		
TYPE	CERTIFICATE NUMBER	ISSUED BY
NEMA-4, 4X	161097-E177862	UL
CSA.NRTL/C	LR110832-1,2	CSA
CE	EMS 1B0704-1,2	ASSESSMENT SERVICE

A: Max. Extended
(Full close)

B: Min. Retracted
(Full open)

Unless otherwise instructed,
the shaft stroke will be arranged
as standard with the maximum
stroke at 0.985inch(25mm)/Unic-L25
and 1.969inch(50mm)/Unic-L50.

STANDARD STROKE		
	A Bottom(max)	B Top(min)
	Stroke	
L25	3.229[inch] 82[mm]	2.244[inch] 57[mm]
	0.985[inch] 25[mm]	

CUSTOMER STROKE		
	A Bottom(max)	B Top(min)
	Stroke	
L25	[inch] [mm]	[inch] [mm]
	[inch] [mm]	[inch] [mm]

DIMENSIONS ARE INCH(mm)

NAME: ACTUATOR OUTER DIMENSIONS	APRV.	DATE	SIGN
MODEL: Unic-L25	CONF.		
	DRAW.	11, JUN, '02	K. SUGIYAMA
KOEI INDUSTRY CO., LTD.	DR. No,	1B410GE1	