
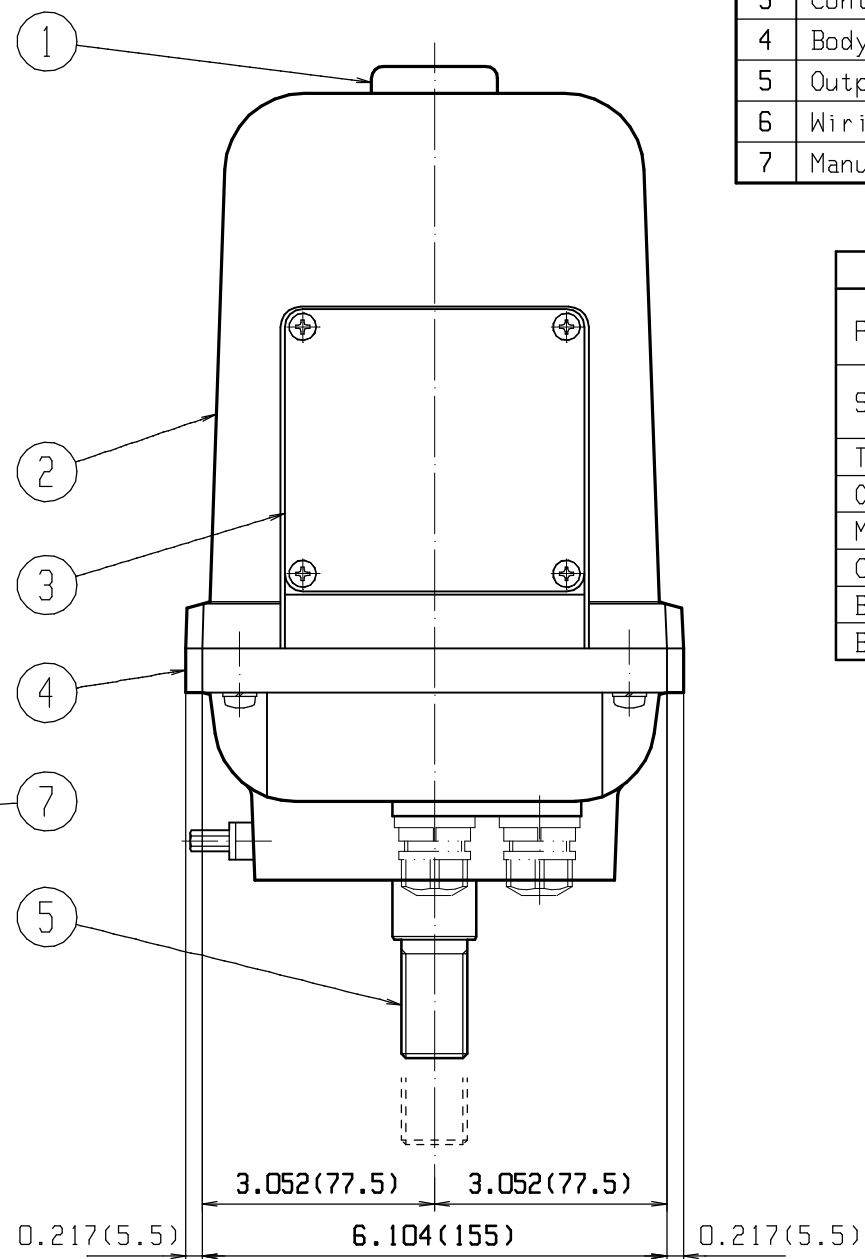
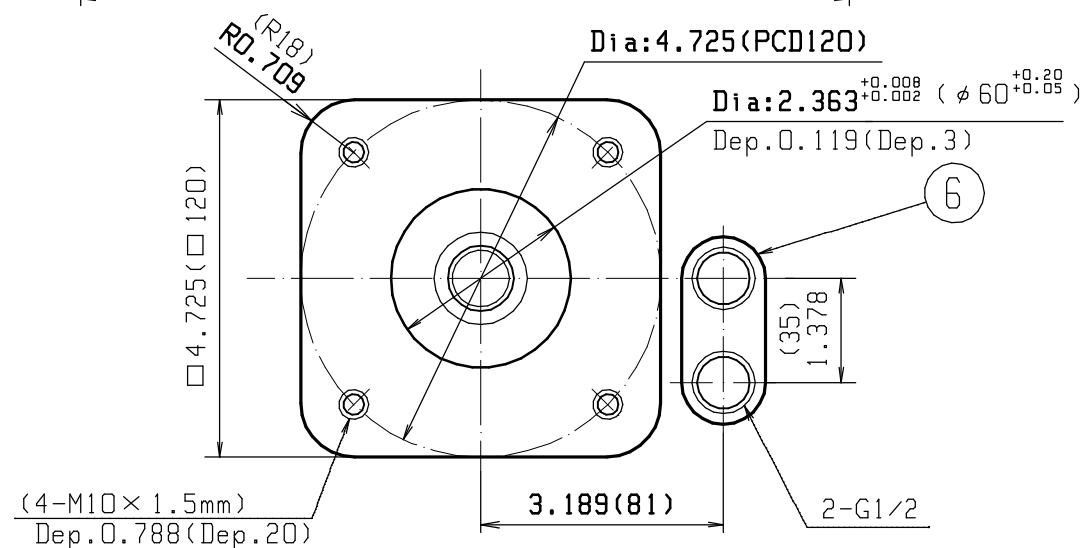


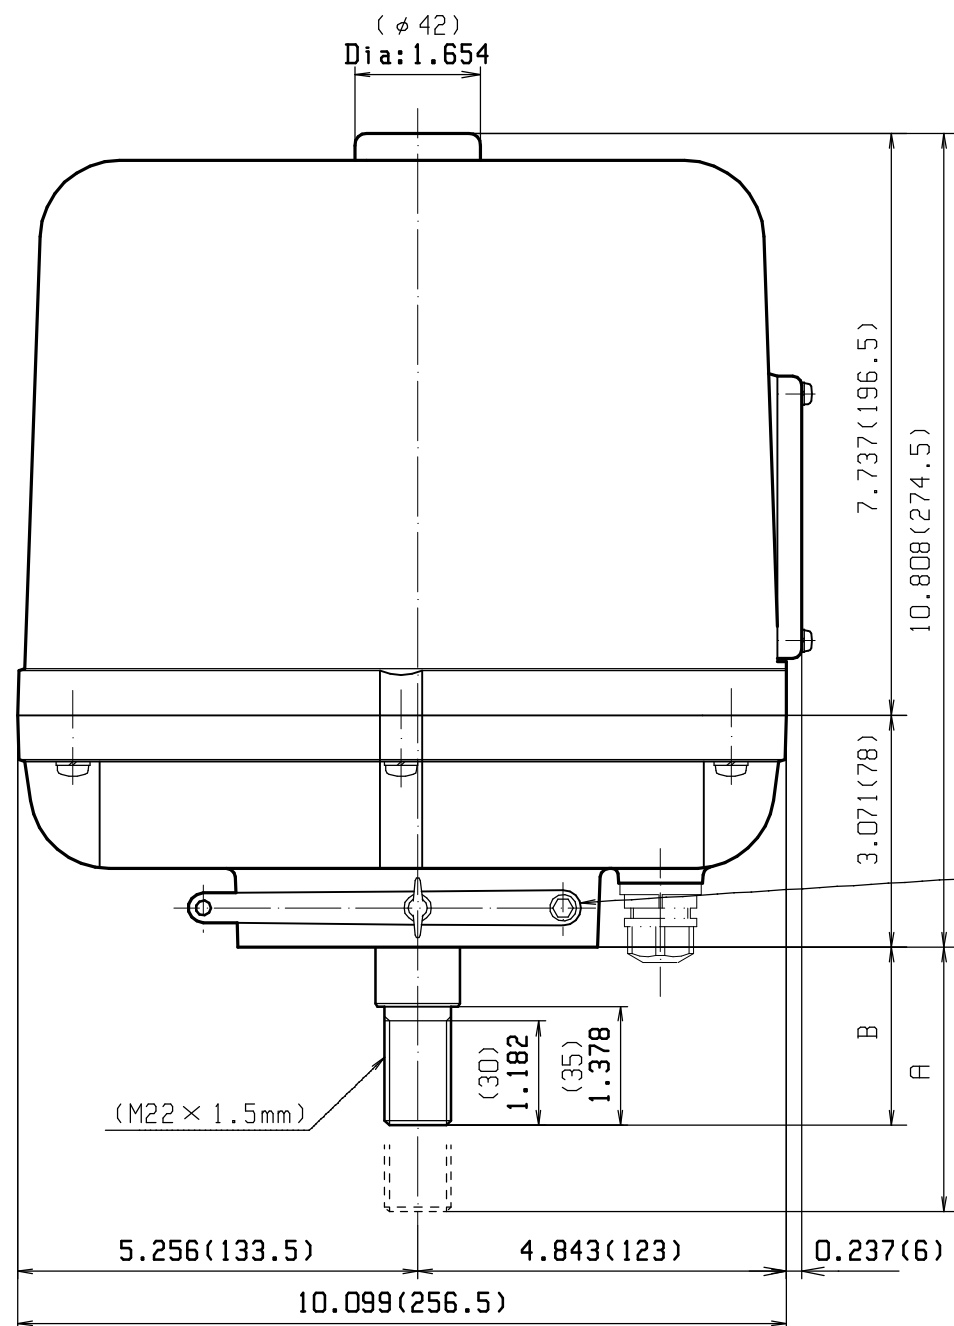

CERTIFICATE OF COMPLIANCE		
TYPE	CERTIFICATE NUMBER	ISSUED BY
NEMA-4, 4X	161097-E177862	UL
CSA.NRTL/C	LR110832-1,2	CSA
CE	EMS 1B0704-1,2	ASSESSMENT SERVICE

DIMENSIONS ARE INCH(mm)

No.	NAME OF PART	Q'TY	M T L	REMARKS
1	Manual Handle Shaft Rubber Cap	1	NBR	
2	Body Cover	1	ADC12	
3	Control Unit Cover	1	ADC12	
4	Body Base	1	ADC12	
5	Output Shaft	1	SUS304	
6	Wiring Hole	2	—	NPT1/2
7	Manual Handle	1	SCS13	

DRIVING UNIT SPECIFICATION	
POWER SOURCE	AC115V • 120V • 240V 60Hz Single phase
STROKE	#1 0~1.969inch(0~50mm)
	#2 0~2.953inch(0~75mm)
THRUST	2640 lbs (11768.ON)
OPERATION SPEED	0.079inch/sec.(2.0mm/sec.)
MANUAL OPERATION	Available
COATING COLOR	Silver metallic
BODY MATERIAL	Aluminium diecast
BODY WEIGHT	16 kg

A:Max.Extended
(Full close)

B:Min.Retracted
(Full open)

Unless other wise instructed,
the shaft stroke will be arranged
as standard with bottom position at
3.741inch(95mm) for the stroke be low
1.969inch(50mm),or 4.528inch(115mm)
stroke at 2.008-2.953inch(51-75mm).
Maximum stroke : 2.953inch(75mm).

STANDARD STROKE			
	A Bottom(max)	B Top(min)	Stroke
#1	3.741[inch] 95[mm]	1.772[inch] 45[mm]	1.969[inch] 50[mm]
#2	4.528[inch] 115[mm]	1.575[inch] 40[mm]	2.953[inch] 75[mm]

CUSTOMER STROKE			
	A Bottom(max)	B Top(min)	Stroke
#1	[inch] [mm]	[inch] [mm]	[inch] [mm]
#2	[inch] [mm]	[inch] [mm]	[inch] [mm]

NAME: <i>ACTUATOR OUTER DIMENSIONS</i>	APRV.	DATE	SIGN
MODEL: <i>Unic-L100</i>	CONF.		
	DRAW.	11, JUN, '02	K. SUGIYAMA
KOEI INDUSTRY CO., LTD.		DR. No,	1D410GE1